

**43F-LCF78-C03**

4.3-10 Female Connector for 7/8" Coaxial Cable, OMNI FIT™ standard, O-ring sealing



OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminum) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. The 4.3-10 connector is an innovative, space-saving RF connection meeting all requirements even under the most severe environmental conditions and not relying on coupling nut torque to meet PIM performance.

**Feature / Benefits**

- Cost effective two-piece design for safe and easy installation
- Compatible with copper and aluminium cable types i.e. one connector for both outer conductor materials eliminates the risk of faulty connector installation and helps to keep inventory down
- Robust mechanical design for low and consistent intermodulation performance i.e. keeps the mobile network performance up reduces the number of dropped calls and avoids revenue losses
- Superior electrical performance for consistent and repeatable VSWR i.e. ensure network system performance
- Waterproof to IP 68 i.e. no downtime risk, secures revenue
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

**Technical features****GENERAL SPECIFICATIONS**

Cable Size	7/8	
Cable Type	Foam Dielectric	
Model Series	LCF78-50 Series	RCF78-50 Series
Connector Interface	4.3-10	
Connector Type	OMNI FIT™ Standard	
Sealing Method	O-ring	

**TESTING AND ENVIRONMENTAL**

Waterproof Level	IP68
------------------	------

**MECHANICAL SPECIFICATIONS**

Plating Outer/Inner	Trimetal/Silver
Length	54.5mm (2.15in)
Outer Diameter	35.5mm (1.4in)
Inner Contact Attachment	Spring Finger
Outer Contact Attachment	Spring C-Ring

**ELECTRICAL SPECIFICATIONS**

Nominal Impedance	50 ohms	
3rd Order IM Product @ 2x20 Watts	-162 ; typical -166	
Maximum Frequency	6 GHz	
Frequency Range	VSWR value	Return Loss value
0 < f ≤ 1.0 GHz	1.03	36.6
1.0 < f ≤ 2.7 GHz	1.04	34.1
2.7 < f ≤ 3.7 GHz	1.08	28.3
3.7 < f ≤ 5.0 GHz	1.1	26.4
5.0 < f ≤ 6.0 GHz	1.25	19.1


**43F-LCF78-C03**

#### 4.3-10 Female Connector for 7/8" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

## ACCESSORIES

### Trimming Tool

TRIM-SET-L78-C02

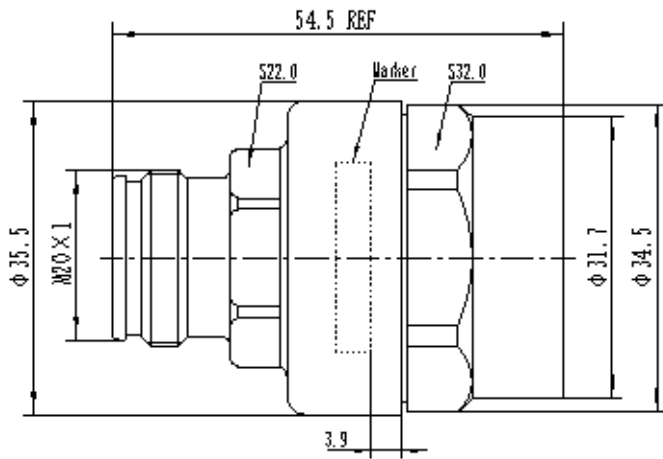

## External Document Links

## Notes