




43M-43F

Coaxial Adapter 4.3-10 Male - 4.3-10 Female

Coaxial Adapter 4.3-10 Male - 4.3-10 Female

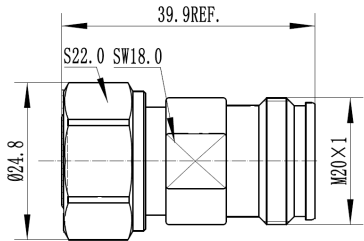

Technical features

STRUCTURE

Product Line	Coaxial Cable Components
Product Type	Coaxial Adapter

MECHANICAL SPECIFICATIONS

Connector A	4.3-10 Male
Center Contact Connector A	Copper Alloy, Silver plated
Outer Contact Connector A	Copper Alloy, CuSnZn plated
Connector B	4.3-10 Female
Center Contact Connector B	Copper Alloy, Silver plated
Outer Contact Connector B	Copper Alloy, CuSnZn plated
Dielectric	PTFE
Sealing class	IP68, connected

ELECTRICAL SPECIFICATIONS

Frequency Range - MHz	DC - 6000
VSWR	DC - 2000 MHz: 1.04 (34.15) 2000 - 3000 MHz: 1.06 (30.71) 3000 - 6000 MHz: 1.10 (26.44)
Insertion Loss	0.05
3rd Order IM Product @ 2x20 Watts	-163 dBc

TEMPERATURE SPECIFICATIONS

Operation Temperature	-45 to 85 (-49 to 185)
-----------------------	------------------------

PACKAGING INFORMATION

Package Quantity	1
------------------	---

External Document Links

Notes