

**716M-LCF78-ECO**

7/16 Male Connector for 7/8" Coaxial Cable, ECO-Series



ECO Series connectors are designed for use with CELLFLEX® ECO cables.

Feature / Benefits

- Cost effective two-piece design for safe and easy installation
- Superior electrical performance for consistent and repeatable VSWR i.e. ensure network system performance
- Waterproof to IP 67 i.e. no downtime risk, secures revenue
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

Technical features**GENERAL SPECIFICATIONS**

Cable Size	7/8
Cable Type	LCF78-50JA-ECO; LCF78-50JFNA-ECO
Model Series	LCF78-50 Series
Connector Interface	7/16
Connector Type	ECO Series
Sealing Method	O-ring

TESTING AND ENVIRONMENTAL

Waterproof Level	IP67
------------------	------

MECHANICAL SPECIFICATIONS

Plating Outer/Inner	Trimetal/Silver
Length	54mm (1.732in)
Outer Diameter	36.5mm (1.437in)
Inner Contact Attachment	Spring Finger
Outer Contact Attachment	Spring Finger


ELECTRICAL SPECIFICATIONS

Nominal Impedance	50 ohms	
3rd Order IM Product @ 2x20 Watts	-155	
Maximum Frequency	5 GHz	
Frequency Range	VSWR value	Return Loss value
DC < f ≤ 1000MHz	1.1	26.4
1000 < f ≤ 2700MHz	1.13	24.3
2700 < f ≤ 3000MHz	1.15	23.1
3000 < f ≤ 5000	1.3	17.7



716M-LCF78-ECO

7/16 Male Connector for 7/8" Coaxial Cable, ECO-Series

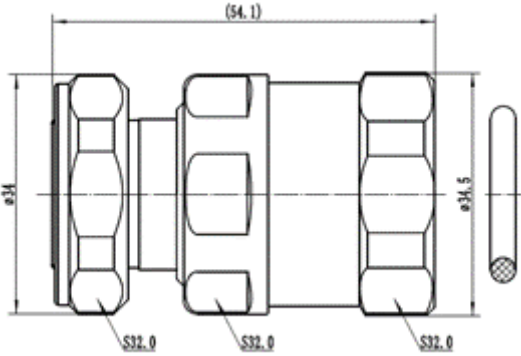

External Document Links

Notes

Related Documents



TML Value Proposition
Value Propositions