




CC-12-2

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

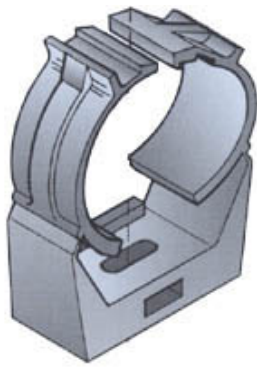

Clic Clamp, 1/2" RADIAFLEX polyamide black, halogen free
Fire class UL94HB
UL746C rated material suitable for outdoor applications

Feature / Benefits

Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

Technical features

GENERAL SPECIFICATIONS

Product Type	Hanger
Hanger Type	Clic clamp
Cable Type	Air Dielectric, Radiating Cable
Color	Black

TESTING AND ENVIRONMENTAL

Fire Class	UL94 HB
Installation Temperature	-20°C to 80°C (-4°F to 176°F)
Operation Temperature	-50°C to 85°C (-58°F to 185°F)
Storage Temperature	-50°C to 85°C (-58°F to 185°F)

MECHANICAL SPECIFICATIONS

Cable Size	1/2
Number of Cable / Waveguide Runs	1
Material	Polyamide




PACKAGING INFORMATION

Package Quantity	500
------------------	-----



CC-12-2

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

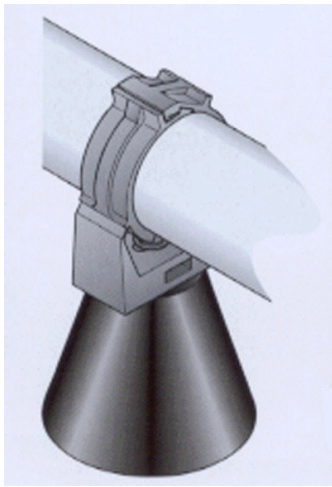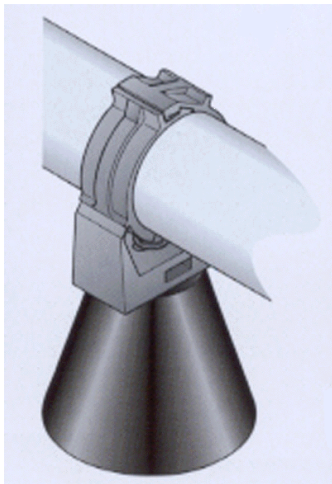

[External Document Links](#)

[Notes](#)