




**CC-158-5**

Clic Clamp for RADIAFLEX® 1-5/8" For use with 7 mm screw diameter

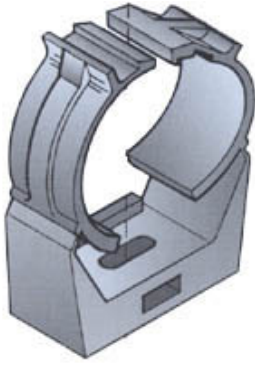

Clic Clamp, 1-5/8" RADIAFLEX polyamide black, halogen free, Fire Class UL94HB

**Feature / Benefits**

- Safe and efficient installation of RADIAFLEX® cable with clic-clamps.
- Simple mounting by using wall plugs and screws – simply push in by hand, clamp will grip and lock by applying slight pressure.
- Expanded screw size by market request.

**Technical features**

**GENERAL SPECIFICATIONS**

Product Type	Hanger
Hanger Type	Clic clamp
Cable Type	Radiating Cable
Color	Black

**TESTING AND ENVIRONMENTAL**

Fire Class	UL94 HB
Installation Temperature	-20°C to 80°C (-4°F to 176°F)
Operation Temperature	-50°C to 85°C (-58°F to 185°F)
Storage Temperature	-50°C to 85°C (-58°F to 185°F)

**MECHANICAL SPECIFICATIONS**

Cable Size	1-5/8
Number of Cable / Waveguide Runs	1
Material	Polyamide
Drill Hole Size	7mm (0.276in)


**PACKAGING INFORMATION**

Package Quantity	50
------------------	----



**CC-158-5**

Clic Clamp for RADIAFLEX® 1-5/8" For use with 7 mm screw diameter

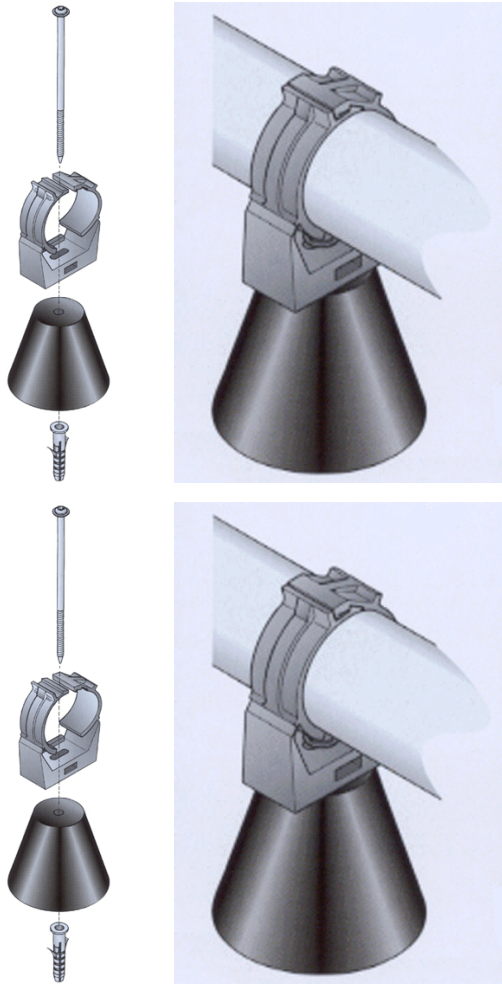

[External Document Links](#)

[Notes](#)