




CC-RE60-4

Clic clamp for RADIAFLEX® RE60

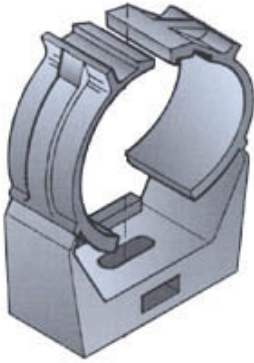

Clic Clamp for RADIAFLEX RE60, Polyamide, Grey, Halogen Free,
Fire Class UL94HB

Feature / Benefits

Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

Technical features

GENERAL SPECIFICATIONS

Product Type	Hanger
Hanger Type	Clic clamp
Cable Type	Radiating Cable
Color	Grey

TESTING AND ENVIRONMENTAL

Fire Class	UL94 HB
Installation Temperature	-20°C to 80°C (-4°F to 176°F)
Operation Temperature	-50°C to 85°C (-58°F to 185°F)
Storage Temperature	-50°C to 85°C (-58°F to 185°F)

MECHANICAL SPECIFICATIONS

Cable Size	RE60
Number of Cable / Waveguide Runs	1
Material	Polyamide

PACKAGING INFORMATION

Package Quantity	20
------------------	----



CC-RE60-4

Clic clamp for RADIAFLEX® RE60



[External Document Links](#)

[Notes](#)