




DBIF-0Z06SQ-SMAL-RS

HYBRIFLEX® Distribution Box, 6 Pairs Optical Fiber for Tower, Pole or Wall Mounting, IP67

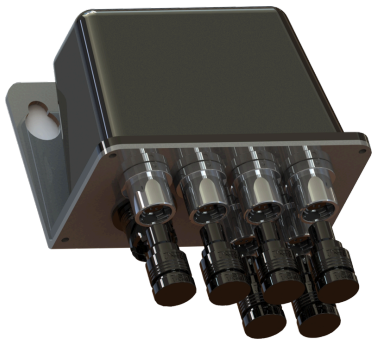

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and costs at Cellular sites.

The HYBRIFLEX Distribution Box is part of the cabling solution for Remote Radio Units. it may be mounted on a tower, rooftop or other suitable location near the RRUs and acts as an interface between the riser cable and the jumper cables.

Feature / Benefits

- IP67 rated enclosure, allowing for indoor or outdoor installation on a roof or tower top
- RoHS Compliant

Technical features

MECHANICAL SPECIFICATIONS

Material	Stainless Steel and ABS
Dimensions (LxWxD)	100 x 150 x 90 (3.94 x 5.91 x 3.54)
Mounting	Wall

CABLES SUPPORTED

Number of Riser Cables supported	1
Supported F/O Connections	1 IP MPO for the Trunk and 6 x Quick Lock Connector for Jumper

Related Documents



Power and Fiber: Our Unique Advantages
Value Propositions