



HCH-38-1R

Cable hanger for HELIFLEX® Air-dielectric coaxial cable



Hangers for the installation of HELIFLEX® cables on different supporting profiles.
Cable Clamp and Extended Counterbed hot-galvanized steel
Screw: stainless steel.

Technical features

GENERAL SPECIFICATIONS

| | |
|--------------|---|
| Product Type | Hanger |
| Hanger Type | Flat iron 6-12mm (0.24-0.47") |
| Cable Type | Air Dielectric, Coaxial Foam Dielectric |

TESTING AND ENVIRONMENTAL

| | |
|-----------------------|--------------------------------|
| Operation Temperature | -50°C to 85°C (-58°F to 185°F) |
| Storage Temperature | -50°C to 85°C (-58°F to 185°F) |

MECHANICAL SPECIFICATIONS

| | |
|-------------------------------------|--|
| Cable Size | 3/8 |
| Material | Cable Clamp : hot-dip galvanized Extended Counterbed : hot-dip galvanized Screw: Stainless steel |
| Recommended / Maximum Clamp Spacing | 0.5 / 0.5 (1.8 / 1.8) |


PACKAGING INFORMATION

| | |
|--------------------------------|-----------------|
| Package Quantity | 1 |
| Weight per piece | 0.06kg (0.13lb) |
| Box Dimensions (Bulk Shipping) | L x W x H |



HCH-38-1R

Cable hanger for HELIFLEX[®] Air-dielectric coaxial cable

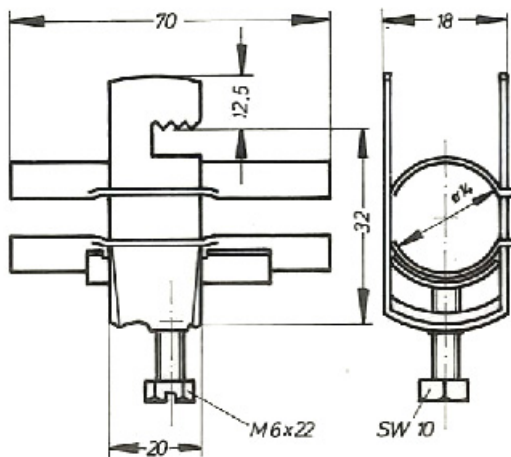

[External Document Links](#)

[Notes](#)