

**MBHS12S-1-F**

Single Multi-block hanger one layer, with angle member adapter



Single Multi block hanger support systems are designed for organizing bundled runs of coax cable. Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

**Feature / Benefits**

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.

**Technical features****GENERAL SPECIFICATIONS**

Product Type	Hanger
Hanger Type	Single Multi-block
Cable Type	Coaxial Foam Dielectric
Color	Black

**TESTING AND ENVIRONMENTAL**

Operation Temperature	-50°C to 85°C (-58°F to 185°F)
Storage Temperature	-50°C to 85°C (-58°F to 185°F)

**MECHANICAL SPECIFICATIONS**

Cable Size	1/2
Number of Cable / Waveguide Runs	1 per layer, 1 layer, 1 run
Configuration	incl. Angle member adapter
Material	Metal part: Stainless steel Plastic parts: Polypropylene
Angle member adapter clamping range mm (in)	4 / 24 (0.157 / 0.945 )
Angle member adapter threads	2x M8
Recommended / Maximum Clamp Spacing	0.2 / 0.2 (0.67 / 0.67)



**PACKAGING INFORMATION**

Package Quantity	10
Weight per piece	0.13kg (0.29lb)
Weight per kit	1.5kg (3.31lb)
Box Dimensions (Bulk Shipping)	250 x 245 x 50 (9.84 x 9.64 x 1.96) L x W x H



**MBHS12S-1-F**

Single Multi-block hanger one layer, with angle member adapter

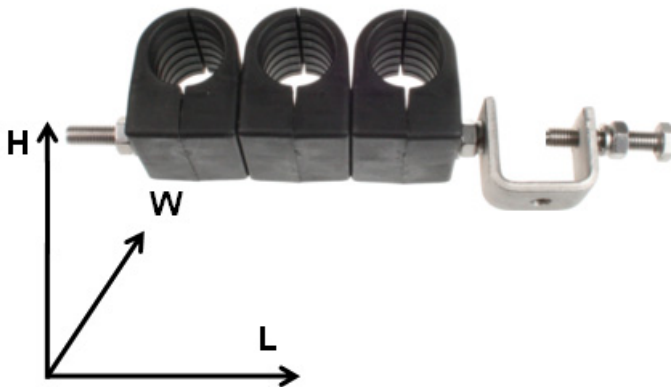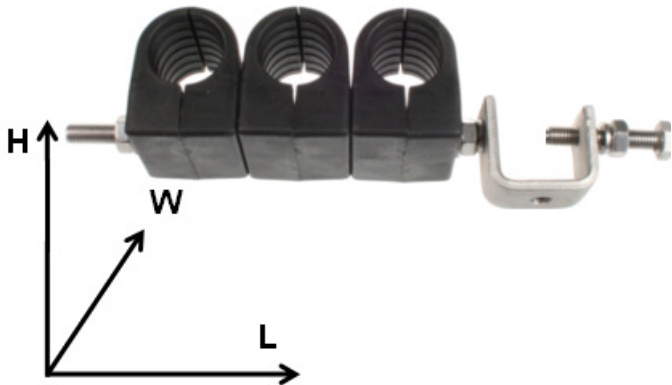

[External Document Links](#)

[Notes](#)