

**MBHS12S-3-F**

Single Multi-block hanger three layer, with angle member adapter



Single Multi block hanger support systems are designed for organizing bundled runs of coax cable. Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

Feature / Benefits

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.

Technical features**GENERAL SPECIFICATIONS**

Product Type	Hanger
Hanger Type	Single Multi-block
Cable Type	Coaxial Foam Dielectric
Color	Black

TESTING AND ENVIRONMENTAL

Operation Temperature	-50°C to 85°C (-58°F to 185°F)
Storage Temperature	-50°C to 85°C (-58°F to 185°F)

MECHANICAL SPECIFICATIONS

Cable Size	1/2
Number of Cable / Waveguide Runs	1 per layer, 3 layers, 3 runs
Configuration	incl. Angle member adapter
Material	Metal part: Stainless steel Plastic parts: Polypropylene
Angle member adapter clamping range mm (in)	4 / 24 (0.157 / 0.945)
Angle member adapter threads	2x M8
Recommended / Maximum Clamp Spacing	0.2 / 0.2 (0.67 / 0.67)



PACKAGING INFORMATION

Package Quantity	10
Weight per piece	0.18kg (0.4lb)
Weight per kit	2kg (4.41lb)
Box Dimensions (Bulk Shipping)	280 x 245 x 50 (11.02 x 9.64 x 1.96) L x W x H



MBHS12S-3-F

Single Multi-block hanger three layer, with angle member adapter

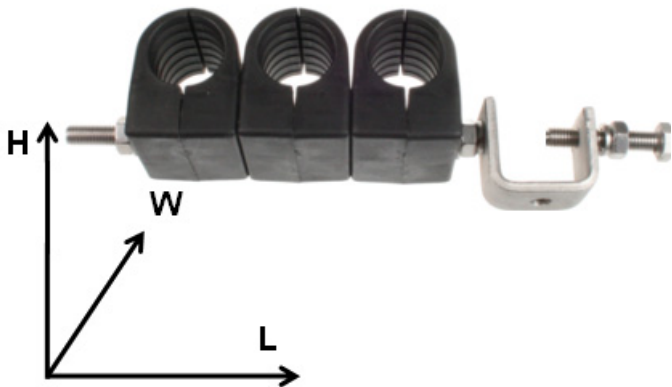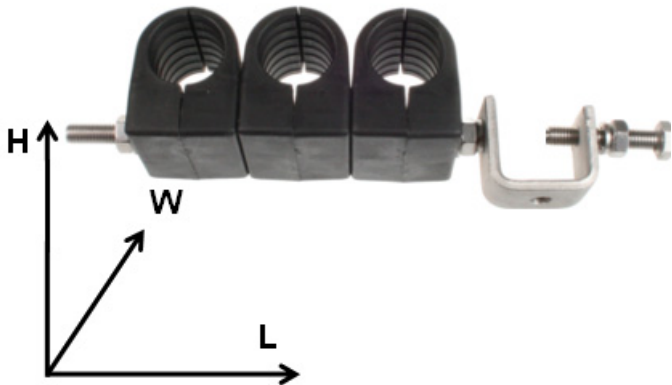

[External Document Links](#)

[Notes](#)