



MBT-14S
Metal tie for TAS-120L

In conjunction with the cable tie for messenger wire TAS-120L an additional metal tie can be used as fire protection installation. The recommended installation spacing is 8 - 10 m (26 - 32 ft). Adjustments could be done with tool MK9SST.



Feature / Benefits

Fire protection installation, stainless steel

Technical features

GENERAL SPECIFICATIONS


Product Type	Hanger
Cable Type	Radiating Cable

MECHANICAL SPECIFICATIONS

Cable Size	1/2
------------	-----


PACKAGING INFORMATION

Package Quantity	100
------------------	-----

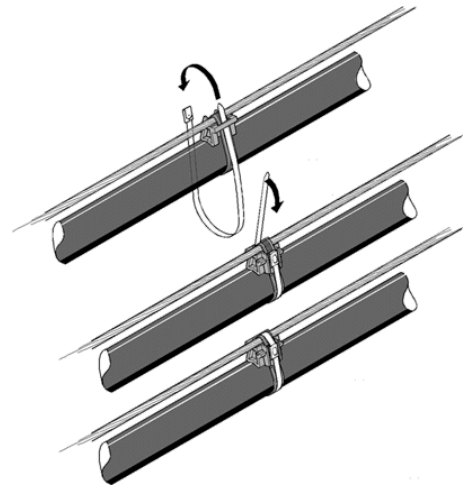



MBT-14S
Metal tie for TAS-120L

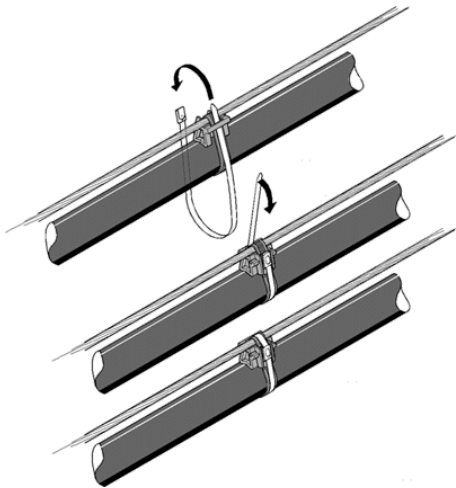

External Document Links

Notes