


**NF-SCF12-E01****N Female Connector for 1/2" Coaxial Cable, OMNI FIT™ Premium,
Straight, threaded gasket and 360° compression sealing**

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications. The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of threaded gasket and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.;

Feature / Benefits

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

Technical features**GENERAL SPECIFICATIONS**

Cable Size	1/2
Cable Type	Foam Dielectric Superflexible
Model Series	SCF12-50 Series
Connector Interface	N
Connector Type	OMNI FIT™ PREMIUM Straight
Sealing Method	Threaded Gasket + 360° Compression

TESTING AND ENVIRONMENTAL

Waterproof Level	IP68
------------------	------

MECHANICAL SPECIFICATIONS

Plating Outer/Inner	NiTin/Silver
Length	62mm (2.441in)
Outer Diameter	24mm (0.945in)
Inner Contact Attachment	Spring Finger
Outer Contact Attachment	360° clamping



NF-SCF12-E01


N Female Connector for 1/2" Coaxial Cable, OMNI FIT™ Premium,
Straight, threaded gasket and 360° compression sealing

ELECTRICAL SPECIFICATIONS

Nominal Impedance	50 ohms	
3rd Order IM Product @ 2x20 Watts	-156 ; typical -162	
Maximum Frequency	6 GHz	
Frequency Range	VSWR value	Return Loss value
0 GHz ≤ 1.0 GHz	1.02	40
1.0 GHz ≤ 2.2 GHz	1.03	37
2.2 GHz ≤ 2.7 GHz	1.03	36
2.7 GHz ≤ 3.8 GHz	1.06	30
3.8 GHz ≤ 5.0 GHz	1.11	26
5.0 GHz ≤ 6.0 GHz	1.15	23

ACCESSORIES

Trimming Tool	TRIM-12-S06 TRIM-SCF12-D01-A
---------------	---------------------------------

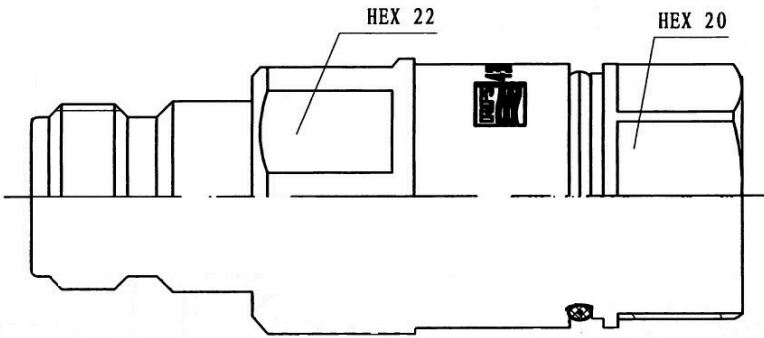

External Document Links

Notes