


**RSB-114-IT**
RSB-Clip

The RSB -Clip round collar has been especially designed for quick installation of HF cables using high flexible stainless steel.

Feature / Benefits

The cables will be secured by a manually easy to reopen grid system.

The base has been formed giving optimal and stable support for various surfaces.

Furthermore the RSB-Clip round collar can be installed using standard fastening devices on walls and profiles.

Two lateral slots along the lower base will allow the use of steel straps for mounting on masts with any diameter.

The progressive ratcheting of the locking system will easily allow for all clamp sizes the adjustment for different cable & tube diameters.

The locking is in any case easy, secure and long-living.

Technical features**GENERAL SPECIFICATIONS**

Product Type	Hanger
Hanger Type	RSB-Clip
Cable Type	Coaxial - Cable Accessories

TESTING AND ENVIRONMENTAL

Installation Temperature	-50°C to 85°C (-58°F to 185°F)
Operation Temperature	-50°C to 85°C (-58°F to 185°F)
Storage Temperature	-50°C to 85°C (-58°F to 185°F)

MECHANICAL SPECIFICATIONS



Cable Size	1-1/4 (30-40mm)
Number of Cable / Waveguide Runs	1
Material	Stainless Steel
Mounting Screw	M8 (not included)
Drill Hole Size	10mm (0.394in)

PACKAGING INFORMATION

Package Quantity	20
Weight per piece	0.022kg (0.049lb)



RSB-114-IT
RSB-Clip

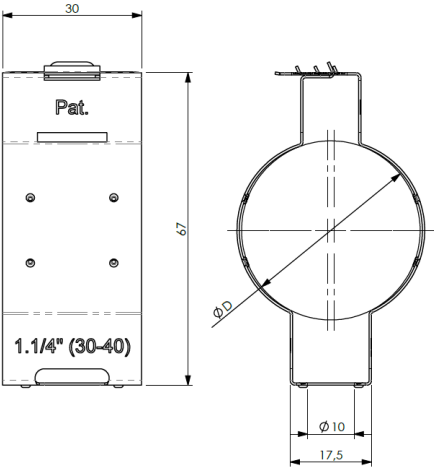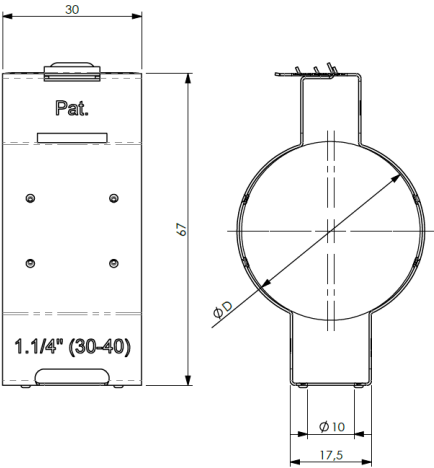

External Document Links

Notes

Related Documents

 **TML Value Proposition**
Value Propositions