




RSB-78-IT
RSB-Clip



The RSB -Clip round collar has been especially designed for quick installation of HF cables using high flexible stainless steel.

Feature / Benefits

- The cables will be secured by a manually easy to reopen grid system.
- The base has been formed giving optimal and stable support for various surfaces.
- Furthermore the RSB-Clip round collar can be installed using standard fastening devices on walls and profiles.
- Two lateral slots along the lower base will allow the use of steel straps for mounting on masts with any diameter.
- The progressive ratcheting of the locking system will easily allow for all clamp sizes the adjustment for different cable & tube diameters.
- The locking is in any case easy, secure and long-living.

Technical features

GENERAL SPECIFICATIONS

Product Type	Hanger
Hanger Type	RSB-Clip
Cable Type	Coaxial- and Air Dielectric Cable Accessories

TESTING AND ENVIRONMENTAL

Installation Temperature	-50°C to 85°C (-58°F to 185°F)
Operation Temperature	-50°C to 85°C (-58°F to 185°F)
Storage Temperature	-50°C to 85°C (-58°F to 185°F)

MECHANICAL SPECIFICATIONS



Cable Size	7/8 (22-30mm)
Number of Cable / Waveguide Runs	1
Material	Stainless Steel
Mounting Screw	M8 (not included)
Drill Hole Size	10mm (0.394in)

PACKAGING INFORMATION

Package Quantity	20
Weight per piece	0.018kg (0.04lb)



RSB-78-IT
RSB-Clip

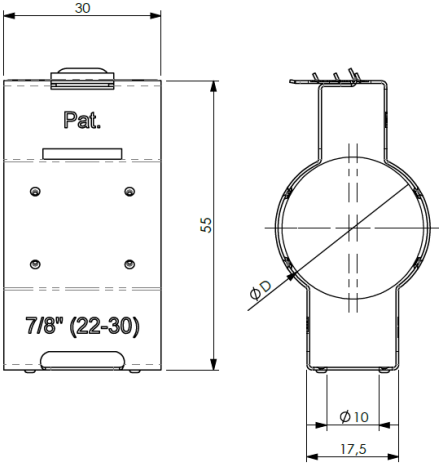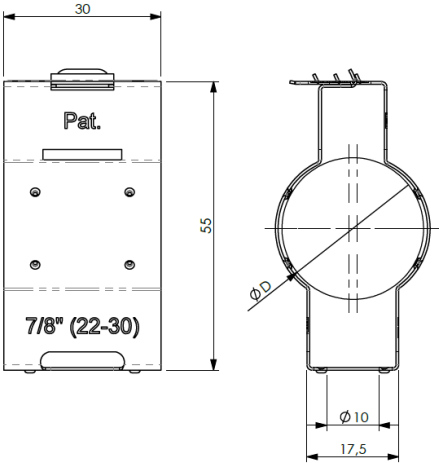

External Document Links

Notes

Related Documents

 **TML Value Proposition**
Value Propositions