



S-865-2

Screw M8 x 65 mm (2.56 in) for metal plug



In the impact of a fire in a tunnel the cable should remain functional as long as possible. Special fire resistant clamp type has been developed for keeping the RADIAFLEX® cable attached as long as possible onto the wall. It also prevents the cable from detaching from the wall that might block any escape route. Fire resistant clips (RSB clips) are made of metal and fixed with screws to the wall using metal plugs. In case of fire the round base will melt. But the fixation will hold the cable in position and enables the cable to keep in operation as long as the cable itself allows. The recommended spacing is 8 to 10 m (26 to 33 ft) for both kinds of installation. The hole of the round base must be drilled to 8.5 mm (0.335 in) before mounting the screw.

Feature / Benefits

Stainless steel, A4, for RSB clip with round base RB 50-4

Technical features

GENERAL SPECIFICATIONS

Product Type	Installation Hardware
--------------	-----------------------

STRUCTURE

Installation Hardware Type	Screw
Coaxial Cable Type	Radiating Cable
Cable Size	1/2", 7/8", 1-1/4", 1-5/8"




MECHANICAL SPECIFICATIONS

Configuration	Screw for RSB clip
Material	Stainless Steel, A4
Length	65mm (2.56in)
Angle member adpter threads	M8

PACKAGING INFORMATION

Package Quantity	100
------------------	-----

S-865-1

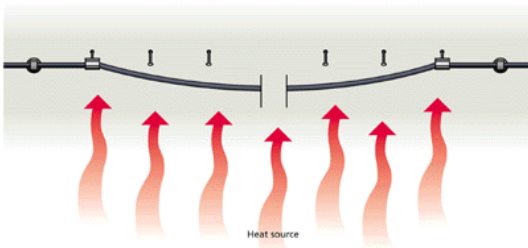
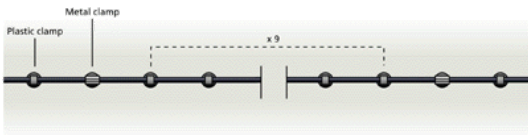
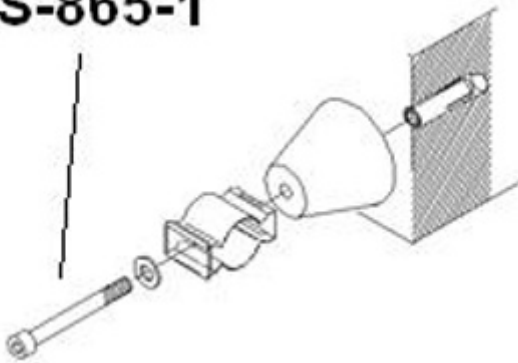




S-865-2

Screw M8 x 65 mm (2.56 in) for metal plug

S-865-1

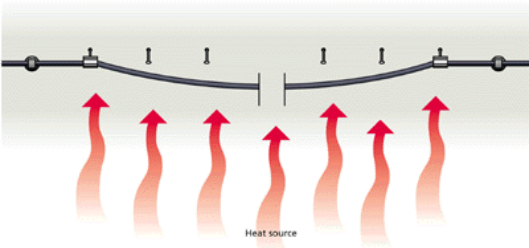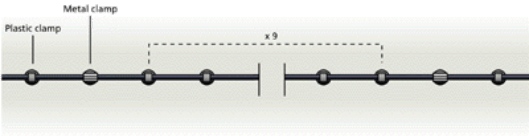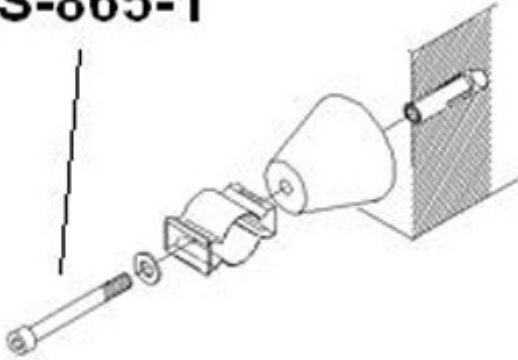

[External Document Links](#)

[Notes](#)