

**43M-LCF158-E01****4.3-10 Male Straight Connector for 1 5/8" Coaxial Cable, OMNI FIT™ Premium, O-Ring and compression sealing**

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications.

The 4.3-10 connector is an innovative, space-saving RF connection meeting all requirements even under the most severe environmental conditions and not relying on coupling nut torque. Sealing against outer conductor and jacket by means of the o-ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket

Feature / Benefits

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Tri metal alloy plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

Technical features**GENERAL SPECIFICATIONS**

Cable Size	1 5/8	
Cable Type	Foam Dielectric, Radiating	
Model Series	LCF158-50A-Series	LCF158-50L-Series
Connector Interface	4.3-10	
Connector Type	OMNI FIT™ PREMIUM Straight	
Sealing Method	O-ring	

TESTING AND ENVIRONMENTAL

Waterproof Level	IP68
------------------	------

MECHANICAL SPECIFICATIONS

Plating Outer/Inner	Trimetal/Silver
Length	94.6mm (3.724in)
Outer Diameter	62.8mm (2.472in)
Inner Contact Attachment	Spring Finger
Outer Contact Attachment	Spring Claw


ELECTRICAL SPECIFICATIONS

Nominal Impedance	50 ohms	
3rd Order IM Product @ 2x20 Watts	-163, typical -167dBc	
Maximum Frequency	2.75 GHz	
Frequency Range	VSWR value	Return Loss value
0 < f ≤ 1.0 GHz	1.02	40.1
1.0 < f ≤ 2.2 GHz	1.03	36.6
2.2 < f ≤ 2.75 GHz	1.06	30.7



43M-LCF158-E01

4.3-10 Male Straight Connector for 1 5/8" Coaxial Cable, OMNI FIT™ Premium, O-Ring and compression sealing

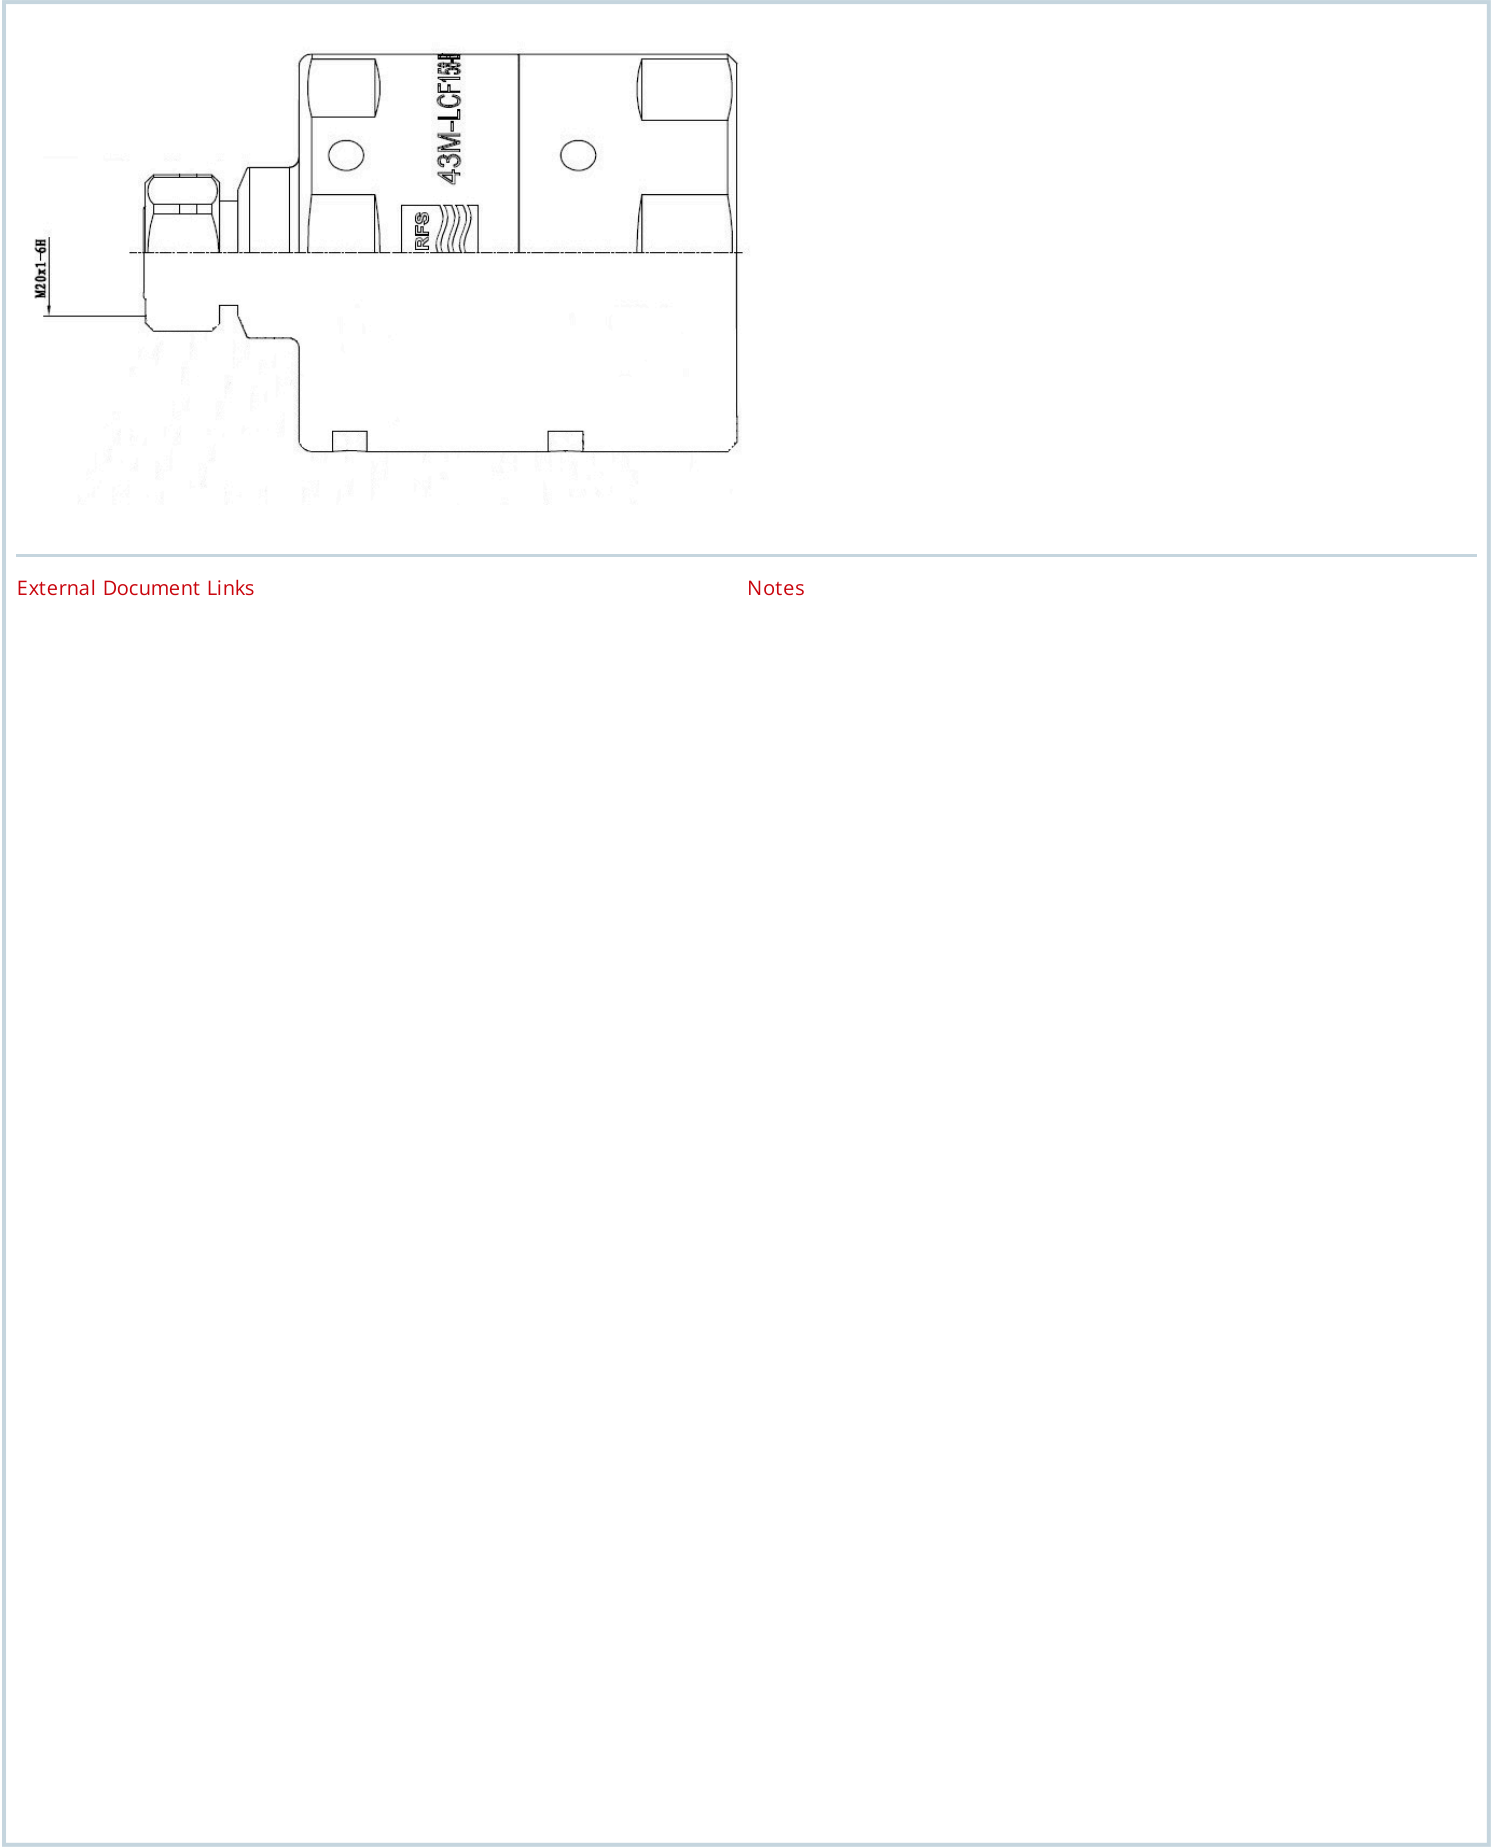

External Document Links

Notes