

**716M-LCF78-D01****7-16 DIN Male Connector for 7/8" Coaxial Cable, OMNI FIT™ Premium,
Straight, O-Ring and compression sealing**

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications.

The 7-16 connector is the most rugged RF connection meeting all requirements even under the most severe environmental conditions. Sealing against outer conductor and jacket by means of O-Ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.

Feature / Benefits

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

Technical features**GENERAL SPECIFICATIONS**

Cable Size	7/8
Cable Type	Foam Dielectric
Model Series	LCF78-50 Series, RCF78-50 Series
Connector Interface	7-16 DIN
Connector Type	OMNI FIT™ PREMIUM Straight
Sealing Method	O-Ring + 360° Compression

TESTING AND ENVIRONMENTAL

Waterproof Level	IP68
------------------	------

MECHANICAL SPECIFICATIONS

Plating Outer/Inner	NiTin/Silver
Length	65.25mm (2.57in)
Outer Diameter	40mm (1.57in)
Inner Contact Attachment	Spring Finger
Outer Contact Attachment	360° clamping

ELECTRICAL SPECIFICATIONS

Nominal Impedance	50 ohms	
3rd Order IM Product @ 2x20 Watts	-163 ; typical -167	
Maximum Frequency	3.7 GHz	
Frequency Range	VSWR value	Return Loss value
0 < f ≤ 1.0 GHz	1.02	40
1.0 < f ≤ 2.7 GHz	1.03	36.6
2.7 < f ≤ 3.7 GHz	1.06	30.7





716M-LCF78-D01

7-16 DIN Male Connector for 7/8" Coaxial Cable, OMNI FIT™ Premium,
Straight, O-Ring and compression sealing

ACCESSORIES

Trimming Tool	TRIM-78-L TRIM-SET-L78-D01 TRIM-LCF78-D01-A
---------------	---

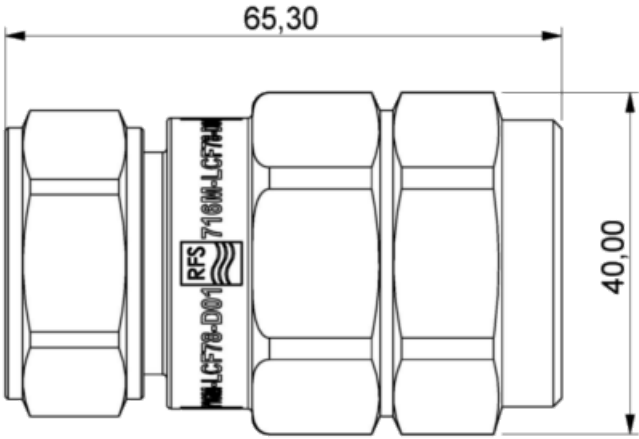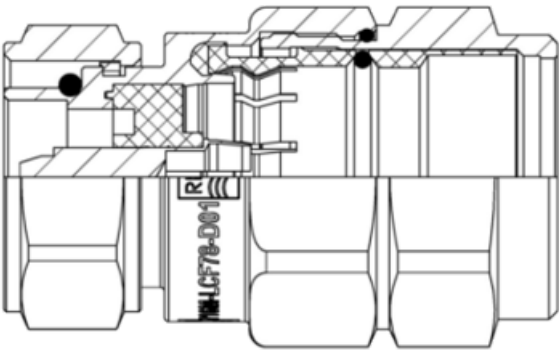

External Document Links

Notes