



CDS-Hybrid-43 6GHz Directional Coupler Series

Broadband Hybrid Combiner for Wireless & Indoor Application, Support 555-6000MHz, 2X2 and 4X4




Technical features

PRODUCT DESCRIPTION

RFS CDS*-Hybrid-43 series Hybrid Combiner have been designed for a variety of wireless applications in the frequency band from 555 to 6000MHz. This series contains 2 product types: 2 by 2 and 4 by 4. The 2 by 2 Hybrid Combiner is four-port directional coupler which equally combines two wireless signals and transfers the combined signal to two output ports whilst the 4 by 4 Hybrid Combiner which equally combines four wireless signals and transfers the combined signal to four output ports. The broad frequency range is ideally suited for multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables.

FEATURES / BENEFITS

- Broadband 555MHz-6000MHz
- 4.3-10-female interfaces
- PIM optimized design (163dBc @ 2x43dBm)
- Ideal for all kind of DAS applications
- Low insertion loss
- High power handling
- Small size, low weight

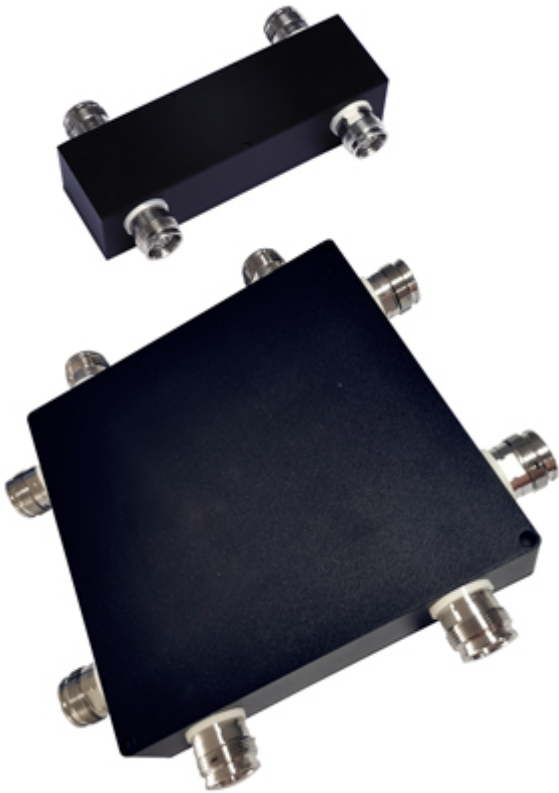

TECHNICAL FEATURES

Electrical Specifications

Frequency Range	MHz	555-6000
Power Rating	W	200
PIM 3rd @2*43 dBm	dBc	163
Input Impedance	Ohm	50

Mechanical Specifications

Connectors		4.3-10 Female
Temperature Range	°C	-25 to +65
IP Level		IP66
RoHS		Compliant



CDS-Hybrid-43 6GHz Directional Coupler Series

Broadband Hybrid Combiner for Wireless & Indoor Application, Support 555-6000MHz, 2X2 and 4X4

Model Number Specifications

Model Number		CDS2x2-43-555/6000	CDS4x4-43-555/6000
VSWR		1.25	1.3
PIM 3rd @2*43 dBm	dBc	163	163@700&1.8GHz, 160@3.5GHz
Coupling Tolerance	dB	3.1dB ±1.1dB@0.555-0.65GHz 3.1dB ±0.8dB@0.65-6GHz	6.2dB ±1.5dB@0.617-5.95GHz 6.2dB ±2dB@0.555-0.617GHz 6.2dB ±2dB@5.95-6GHz
Isolation	dB	20dB@0.555-2.7GHz 21dB@2.7-6GHz	19dB@0.555-6GHz
Dimensions, L*W*H	mm (in)	145*79*36 (5.71*3.11*1.42)	239*239*35 (9.4*9.4*1.38)
Net Weight, ±10%	kg (lb)	0.56(1.23)	1.36(3)

External Document Links

LINK to VEX FILES

Notes