

**NM-LCF158-D01****N Male Connector for 1-5/8" Coaxial Cable, OMNI FIT™ Premium, Straight, O-Ring and compression sealing**

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications.

The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of O-Ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.

**Feature / Benefits**

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

**Technical features****GENERAL SPECIFICATIONS**

Cable Size	1-5/8
Cable Type	Foam Dielectric
Model Series	LCF158-50 Series, RCF158-50 Series
Connector Interface	N
Connector Type	OMNI FIT™ PREMIUM Straight
Sealing Method	O-Ring + 360° Compression

**TESTING AND ENVIRONMENTAL**

Waterproof Level	IP68
------------------	------

**MECHANICAL SPECIFICATIONS**

Plating Outer/Inner	NiTin/Silver
Length	91.65mm (3.6in)
Outer Diameter	60mm (2.36in)
Inner Contact Attachment	Spring Finger
Outer Contact Attachment	360° clamping

**ELECTRICAL SPECIFICATIONS**

Nominal Impedance	50 ohms	
3rd Order IM Product @ 2x20 Watts	-156 ; typical -162	
Maximum Frequency	2.75 GHz	
Frequency Range	VSWR value	Return Loss value
0 < f ≤ 1.0 GHz	1.02	40
1.0 < f ≤ 2.2 GHz	1.03	36.6
2.2 < f ≤ 2.75 GHz	1.06	30.7




**NM-LCF158-D01**

N Male Connector for 1-5/8" Coaxial Cable, OMNI FIT™ Premium,  
Straight, O-Ring and compression sealing

**ACCESSORIES**

Trimming Tool	TRIM-SET-L114-D01 TRIM-LCF158-D01-A
---------------	--

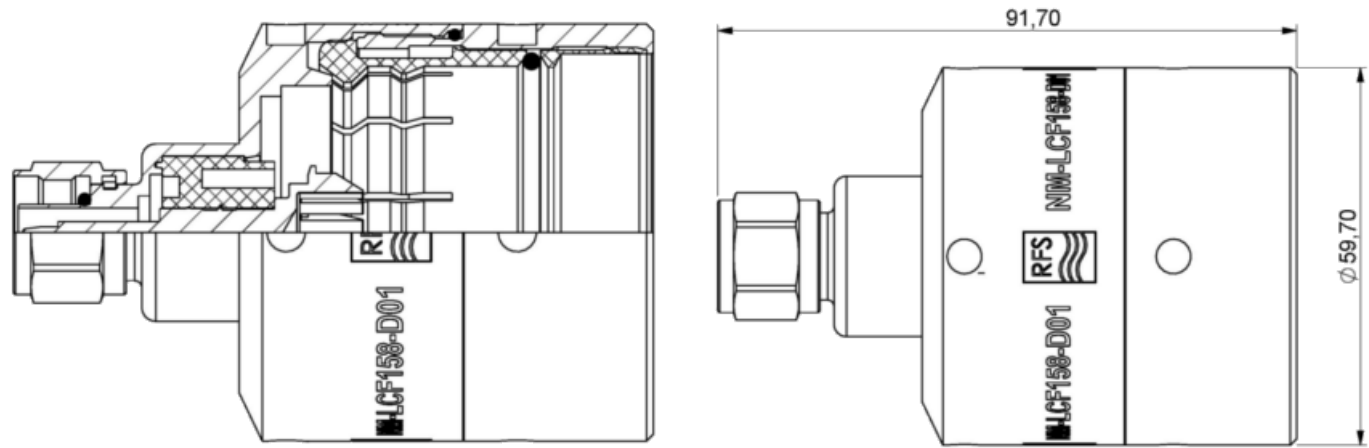

External Document Links

Notes