



TER-43-3800-100W

Load, 4.3-10 male, 100 Watt



The 43-TER Series are coaxial loads which operate from DC up to 3.8 GHz. The products are ideally suited for termination of unused ports in distributed antenna systems or in RADIAFLEX® radiating cables systems.

Feature / Benefits

- Ideal for all kind of DAS applications
- Finned termination for optimized heat dissipation
- Low VSWR

Technical features

GENERAL SPECIFICATIONS

Product Type	Load
--------------	------

ELECTRICAL SPECIFICATIONS


Frequency Range	DC-3.800 MHz
Impedance	50 Ohm
Value of Returnloss	Value of Return Loss (dB)
	19
Total Input Power	100 W

MECHANICAL SPECIFICATIONS

Input Connector Type	4.3-10 male
----------------------	-------------

TEMPERATURE SPECIFICATIONS

Temperature Range	-25°C to 65°C (-13°F to 149°F)
Environmental Class	Indoor

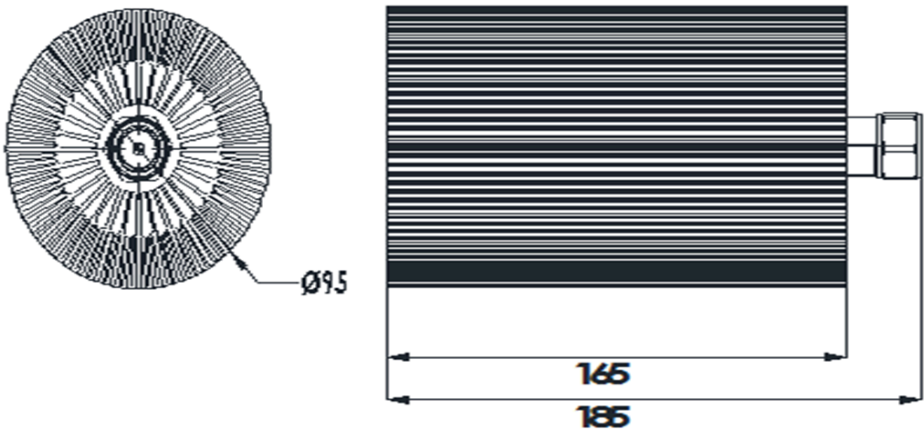

External Document Links

Notes